


# VINYL FACED MAGNETIC SHEET



## Digitally printable in various widths & thicknesses

- Manufacturing process: both calendered, then laminated together
- Material composition: 90% high grade ferrite powder, 10% synthetic binder, free of PVC & phthalates, laminated to self-adhesive PVC vinyl
- Adhesive: N/A
- Magnetisation: one face only, UV coated
- Pole pitch: 1.5mm to 2.5mm (travelling down the length of the roll)
- Density:  $3.6\text{g/cm}^3$
- Colour: multiple choices in matt & gloss
- Hardness: (Shore-D)  $33 \pm 5$
- Working Face: opposite the vinyl face
- Magnetic stability: immune to magnetic damage in normal use
- Working temperature:  $-10^\circ\text{C}$  to  $60^\circ\text{C}$  above which, performance will reduce
- Storage temperature: between  $10^\circ\text{C}$  and  $40^\circ\text{C}$

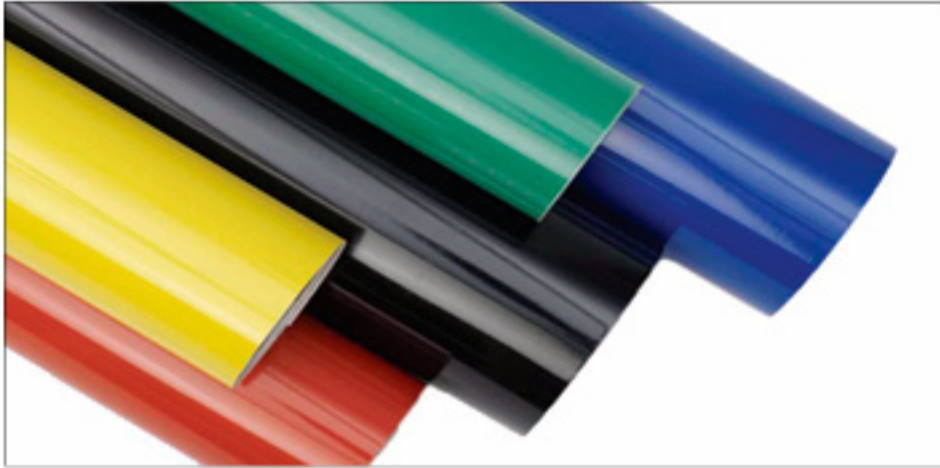