



Για Solvent, Eco Solvent, Latex & UV

Cast εκτυπώσιμο αυτοκόλλητο
ειδικά σχεδιασμένο για οχήματα!

Για μερική αλλά και πλήρη
κάλυψη οχημάτων.

1.37μ
πλάτος


GLOSS
φινίρισμα

50mic
πάχος

B.F.
bubble free

DRIFT
τεχνολογία

USA
made

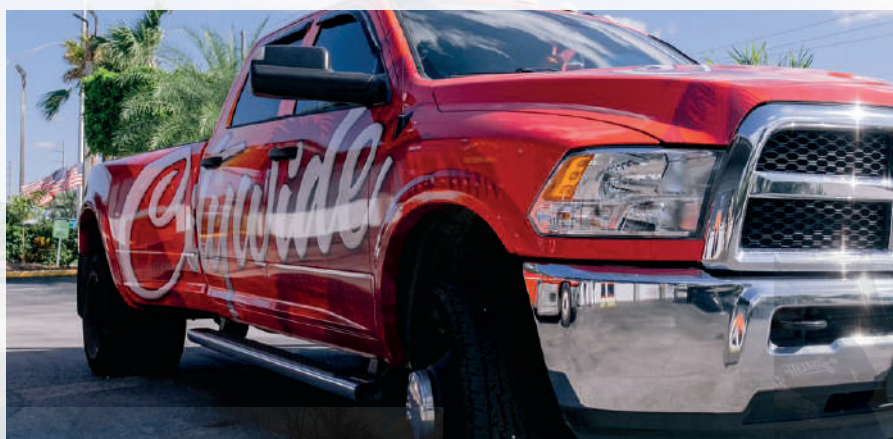

Απόλυτα συμβατό
με την πλαστικοποίηση
GF - 831 GLOSS



ΕΚΤΥΠΩΣΙΜΟ ΟΛΟΓΡΑΦΙΚΟ ΙΡΙΔΙΖΟΝ ΑΥΤΟΚΟΛΛΗΤΟ 765

FILM	
Film Type	Holographic Film
Film Thickness (mils/ μ m)	6.0 / 152 (+/- 10%)
Film Weight (gsm)	190
Gloss (60°)	≥ 70
Opacity (%)	99
Tensile Strength (lbs/in)	N/A
Elongation (%)	N/A
Dimensional Stability (FTM 14)	MD $\leq$ 1.00 mm / CD $\leq$ 1.00 mm
ADHESIVE	
Adhesive Type	Emulsion Acrylic
Adhesive Thickness (mils/ μ m)	0.8-1.0 / 20-25
Adhesive Color	Clear
Peel Strength on Stainless Steel (lbs/in) / (N/25mm) 15 min	2.2 / 9.6
Peel Strength on Stainless Steel (lbs/in) / (N/25mm) 24 hrs	3.8 / 17
LINER	
Liner Weight (#/gsm)	90 / 145
Liner Type	White 2-side PE-Coated Kraft
Liner Thickness (mils/ μ m)	6.7 / 170
Release Force @ 360" / min (g/2")	70-100
PERFORMANCE GUIDANCE	
Application Temperature	$\geq +50$ °F
Service Temperature	-40 °F to 200 °F
Shelf Life	1 year
Storage Temp / Rel. Humidity	70 °F / 50%
Outdoor Durability	1 year
COMPATIBLE PRODUCTS	
Recommended Laminates	GF 108, GF 110, GF 231, GF 242, GF 247 or GF 400