



Για Solvent, Eco Solvent, Latex & UV

Cast εκτυπώσιμο αυτοκόλλητο
ειδικά σχεδιασμένο για οχήματα!

Για πλήρη κάλυψη οχημάτων.

1.37μ
πλάτος


GLOSS
φινίρισμα

50mic
πάχος

B.F.
bubble free

DRIFT
τεχνολογία

USA
made

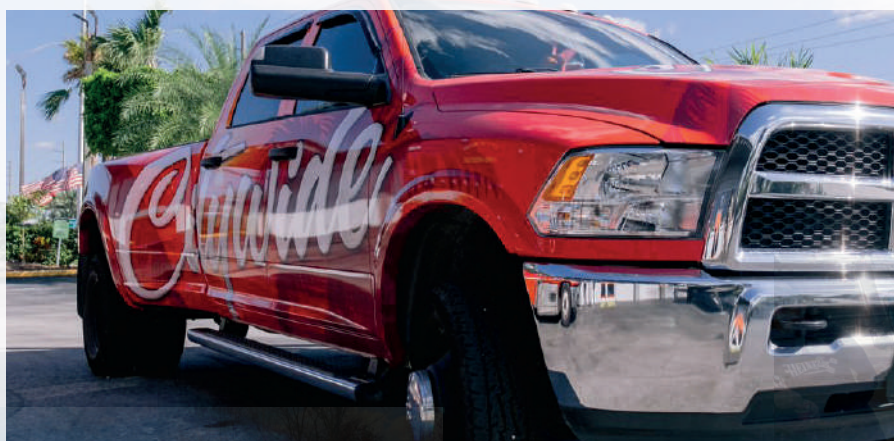

Απόλυτα συμβατό
με την πλαστικοποίηση
GF - 831 GLOSS



CAST ΕΚΤΥΠΩΣΙΜΟ ΑΥΤΟΚΟΛΛΗΤΟ 830

FILM	
Film Type	Cast White Vinyl
Film Thickness (mils/ μ m)	2.0 / 50 (+/- 10%)
Film Weight (gsm)	78
Gloss (60°)	≥ 90
Opacity (%)	99
Elongation (%)	MD ≥ 200
Dimensional Stability (FTM 14)	MD ≤ 0.35 mm
ADHESIVE	
Adhesive Type	Solvent Acrylic
Adhesive Thickness (mils/ μ m)	1.2-1.4 / 30-36
Peel Strength on Stainless Steel (lbs/in) / (N/25mm) 15 min	2.5 / 11
Peel Strength on Stainless Steel (lbs/in) / (N/25mm) 24 hrs	3.0 / 13
LINER	
Liner Weight (#/gsm)	106 / 160 (+/- 10%)
Liner Type	White 2-sided PE-Coated Kraft, Slideable Air-Egress
Liner Thickness (mils/ μ m)	8.0 / 200
Release Force @ 300" / min (g/2")	80-120
PERFORMANCE GUIDANCE	
Application Temperature	$\geq +50$ °F
Service Temperature	-40 °F to 180 °F
Shelf Life	2 years
Storage Temp / Rel. Humidity	70 °F / 50%
Outdoor Durability	8 years
Long-Term Removability	* 4 year Clean Removability

CAST ΠΛΑΣΤΙΚΟΠΟΙΗΣΗ 831

FILM	
Film Type	Cast Clear Vinyl
Film Thickness (mils/ μ m)	2.0 / 50 (+/- 10%)
Film Weight (gsm)	65
Gloss (60°)	≥ 90
Opacity (%)	N/A
Elongation (%)	MD ≥ 200
Dimensional Stability (FTM 14)	MD ≤ 0.35 mm
ADHESIVE	
Adhesive Type	Solvent Acrylic
Adhesive Thickness (mils/ μ m)	0.8-1.2 / 20-31
Adhesive Color	Clear
Peel Strength on Stainless Steel (lbs/in) / (N/25mm) 15 min	2.2 / 9.6
Peel Strength on Stainless Steel (lbs/in) / (N/25mm) 24 hrs	2.8 / 12
LINER	
Liner Weight (#/gsm)	74 / 120 (+/- 10%)
Liner Type	White Clay-Coated Kraft
Liner Thickness (mils/ μ m)	4.6 / 118
Release Force @ 300" / min (g/2")	15-30
PERFORMANCE GUIDANCE	
Application Temperature	$\geq +50$ °F
Service Temperature	-40 °F to 180 °F
Shelf Life	2 years
Storage Temp / Rel. Humidity	70 °F / 50%
Outdoor Durability	8 years (vertical application - see zone1)